


[H]ardBASS Active Subwoofers

DF-SUB

High-Dynamic Range 18" Active Loudspeaker


Front View:

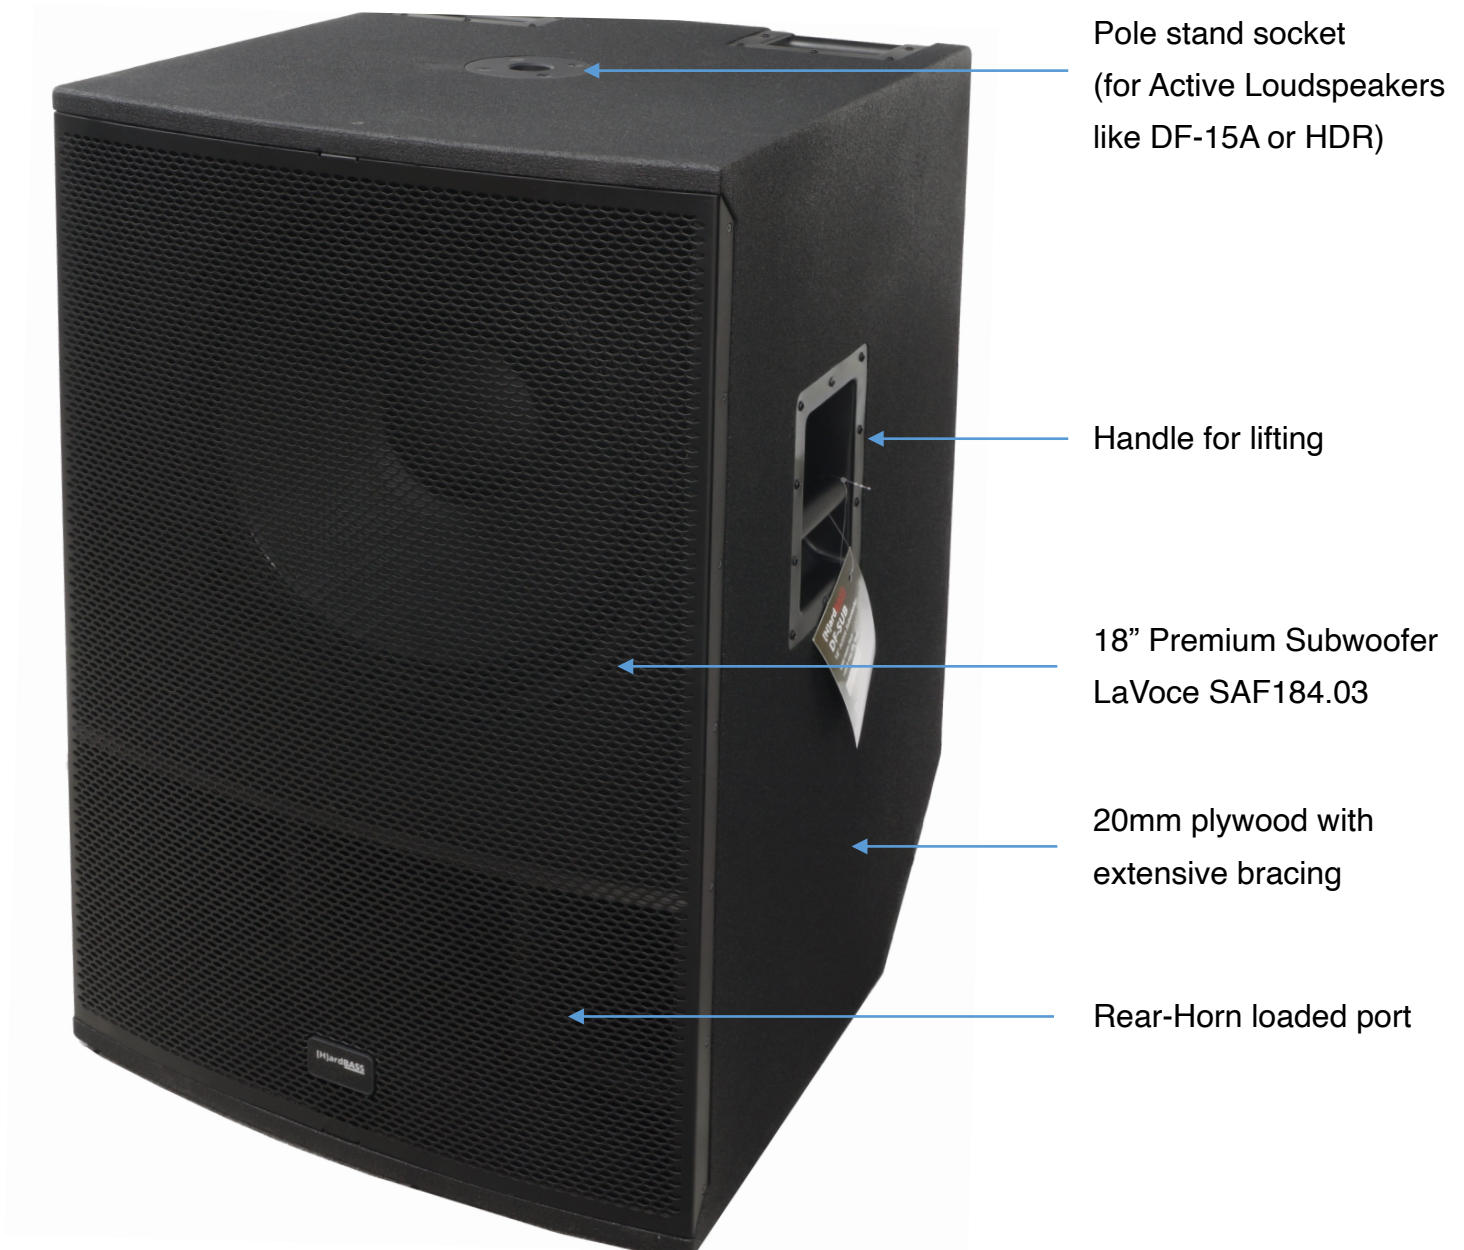

Rear View:



Side View:

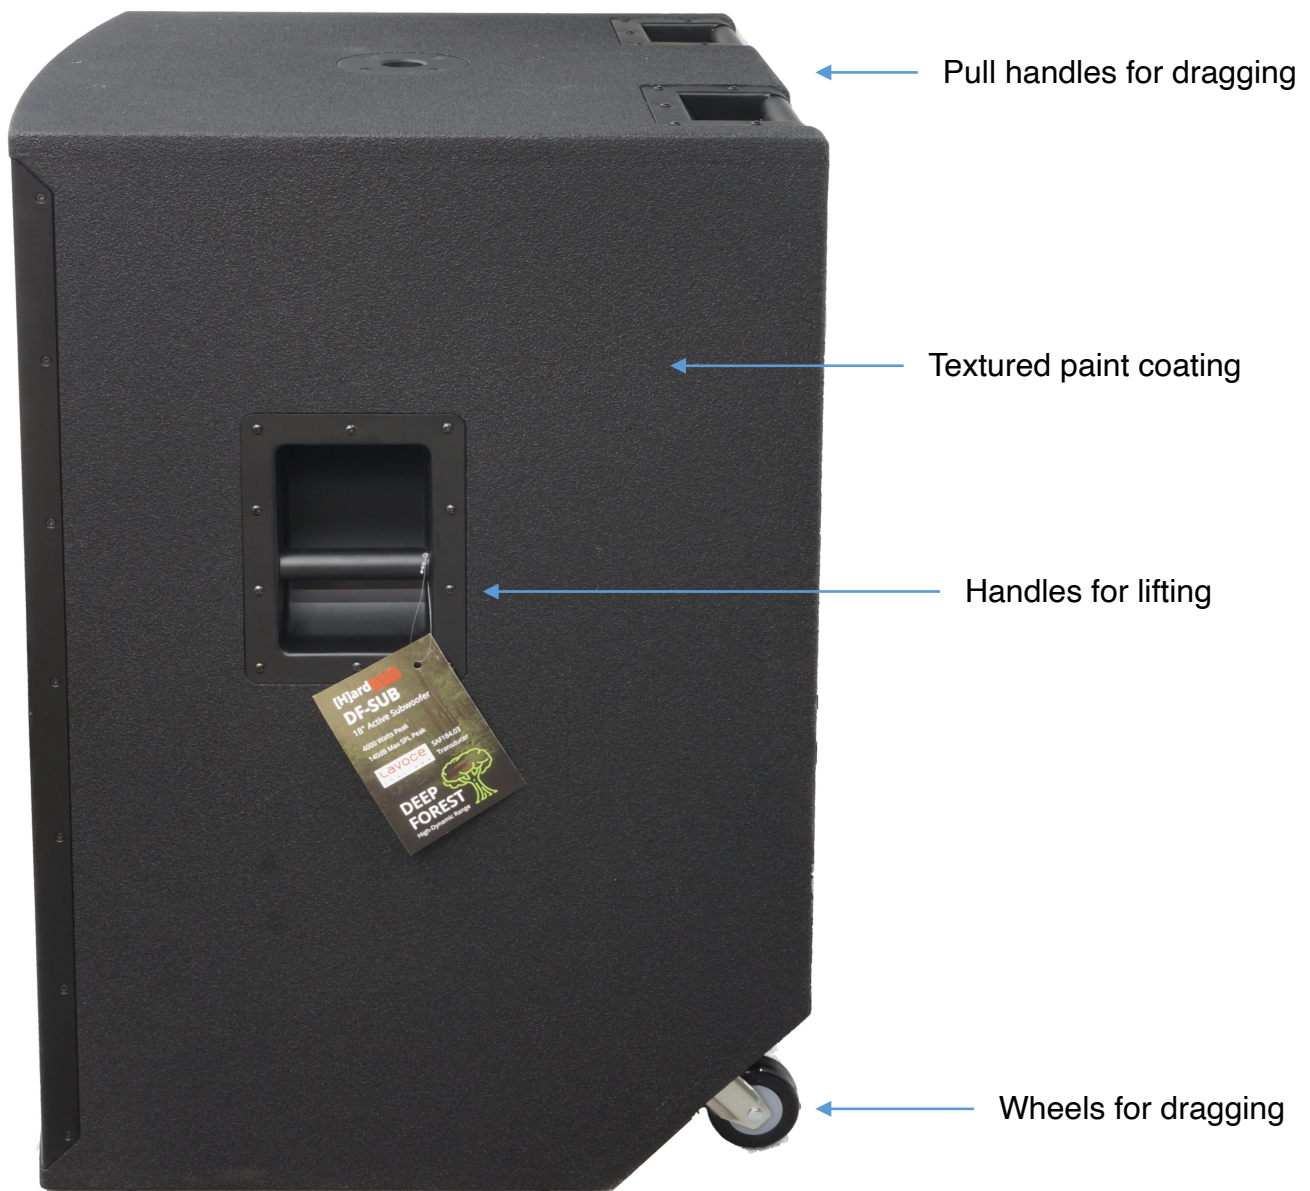

Amplifier View:



Main Volume

Low Pass adjustment
90Hz to 150Hz

Power, Signal and Limiter LEDs

Phase switch and LED
indicator

Balanced XLR
Input and Output

Service connection
(RS485)

Amplifier Heatsink
• Class-D w/ DSP
• 4000W Peak
• 2000W RMS

Powercon Input and Output
120V / 60Hz US Plug
(cable included)

Power On/Off switch

Dimensions:



Pole Stand Mounting (DF-15A + DF-SUB) and (HDR + DF-SUB):

