

6X300

Midrange / Full-Range

300W

Available in 8Ω or 4Ω



Technical Specifications		
Size	mm (in)	165 (6.5)
Power Handling	W Peak	300
	W Continuous	150
Nominal Impedance	Ohm	8 or 4
Frequency Response	Hz	100-10K
Sensitivity	dB/SPL	97
Voice Coil Diameter	mm (in)	38 (1.5)
VC Winding Material		Copper
Weight	kg (lb.)	1.85 (4)

Mounting Information		
Diameter	mm	168
Bolt Circle	mm	4--6.5mm
Bolt hole	mm	155
Baffle Cutout	mm	128
Depth	mm	75
Weight	Kg	2

Product Overview

The 6X300 is a high-efficiency driver engineered for tight mid-bass impact and natural midrange clarity. With an extended high-frequency response, it excels as a standalone full-range solution for custom car audio or as a dedicated midrange or mid bass component in professional 2-way and 3-way systems.

Electro-acoustic Specs		
Fs	Hz	110
Re	Ohm	6.4 or 3.2
Qes		0.52
Qms		0.49
Qts		0.47
Vas	L	5
Sd	cm ²	131
Xmax	mm	1.5
Mms	g	10
Bl	T.m	10


6X300

Midrange / Full-Range


300W



Frequency Response Graph

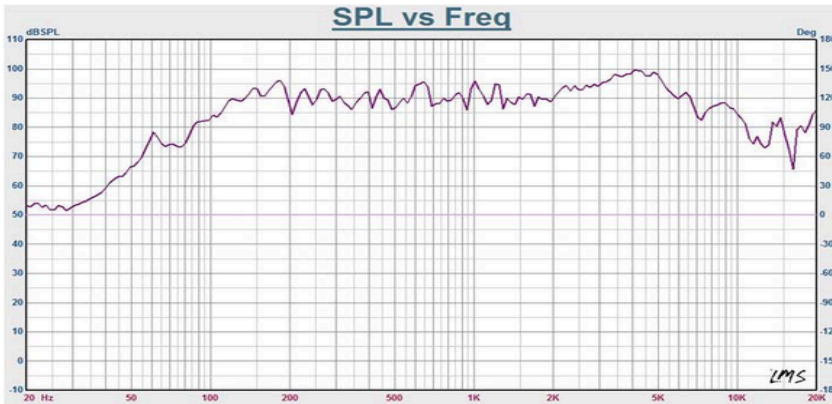

Impedance Graph

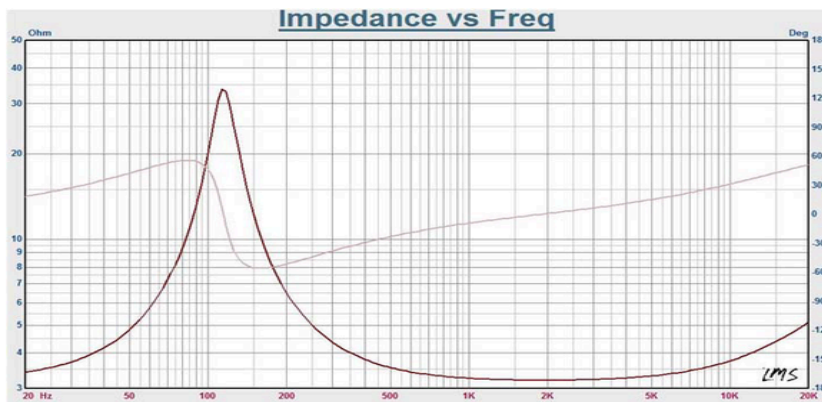

Date Published	07/01/26
Disclaimer	Actual specifications may differ from this model reference data sheet
Disclaimer	Specifications and product cosmetics are subject to change without notice.
Contact	200 Schermerhorn Street, Brooklyn, NY 11201, USA