

10X600

Midrange / Full-Range

600W



Technical Specifications		
Size	mm (in)	250 (10)
Power Handling	W Peak	600
	W Continuous	300
Nominal Impedance	Ohm	8
Frequency Response	Hz	100-6K
Sensitivity	dB/SPL	101
Voice Coil Diameter	mm (in)	49.5 (2)
VC Winding Material		Copper
Weight	kg (lb.)	4 (8.8)

Mounting Information		
Diameter	mm	258
Bolt Circle	mm	247
Bolt hole	mm	8--8
Baffle Cutout	mm	234
Depth	mm	107
Weight	Kg	4

Product Overview

The 10X600 is a high-efficiency driver engineered for tight mid-bass impact and natural midrange clarity.

With an extended high-frequency response, it excels as a full-range solution for custom car audio or as a dedicated midrange or mid bass component in professional 2-way and 3-way systems.

Electro-acoustic Specs		
Fs	Hz	100
Re	Ohm	6.2
Qes		0.51
Qms		3.2
Qts		0.47
Vas	L	16.2
Sd	cm2	221
Xmax	mm	4
Mms	g	29.2
Bl	T.m	10.9


10X600

Midrange / Full-Range


600W



Frequency Response Graph

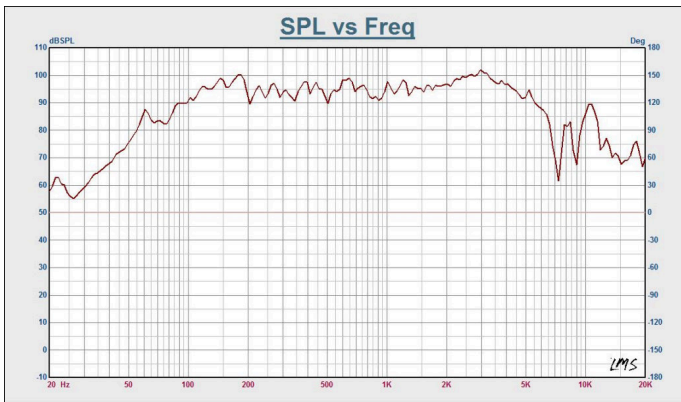

Impedance Graph

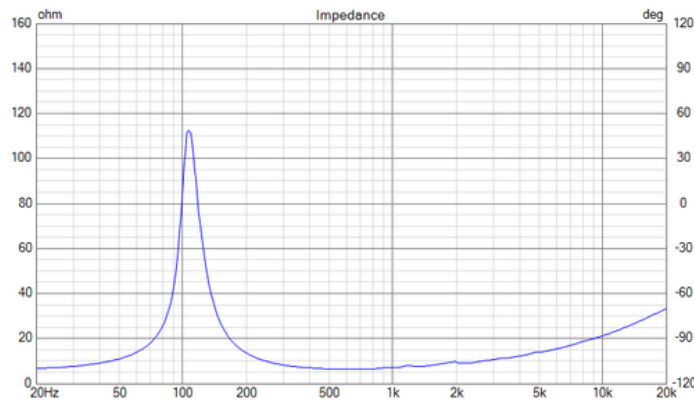

Date Published	07/01/26
Disclaimer	Actual specifications may differ from this model reference data sheet
Disclaimer	Specifications and product cosmetics are subject to change without notice.
Contact	200 Schermerhorn Street, Brooklyn, NY 11201, USA